



**POWER SOLUTIONS
INTERNATIONAL**

8.8L NATURAL GAS/PROPANE ENGINE



The PSI 8.8-liter engine is a U.S. EPA-certified natural gas and propane power unit developed from the block up to be reliable and durable. The newly-designed and engineered 8.8-Liter engine provides industrial, bus, truck and marine OEMs a fully integrated drop-in solution with uncompromised power performance, maximum fuel efficiency, emissions certification and fuel flexibility.

Superior engine performance is driven by an ECU that integrates and coordinates all critical functions including: Governor, Variable Ignition Timing, Air Fuel Ratio Control, Knock Suppression and Engine Protection.

The PSI Energy product lineup has displacements from 0.97L to 65L. These engines are an extension of the PSI product line, which is based upon blocks from 650cc to 8.8L. All PSI engines feature the same fuel systems and controls, simplifying your application development and support.

GENERAL DATA

- Cast iron block and heads, 10:1 compression ratio, overhead valve/2V configuration
- Fuel and emission control system that meets EPA/CARB emission regulations for LSI engines
- Camshaft gear-driven oil system with cartridge-type filter and belt-driven centrifugal water pump
- Temperature-regulated oil cooler
- 12VDC Starter and Alternator
- Cooling fans, radiator & complete cooling systems
- Dry-type industrial air cleaners (safety element available)
- 3-Way Catalytic Converter with certified units
- Full ECU engine control with coil-on-plug variable timing ignition
- Engine protection for oil pressure, coolant temperature, overspeed
- Integrated knock sensing and control
- CANBUS J1939 interface
- Available as Naturally Aspirated, Turbo & Charge Air Cooled (CAC HO = 200kWe)

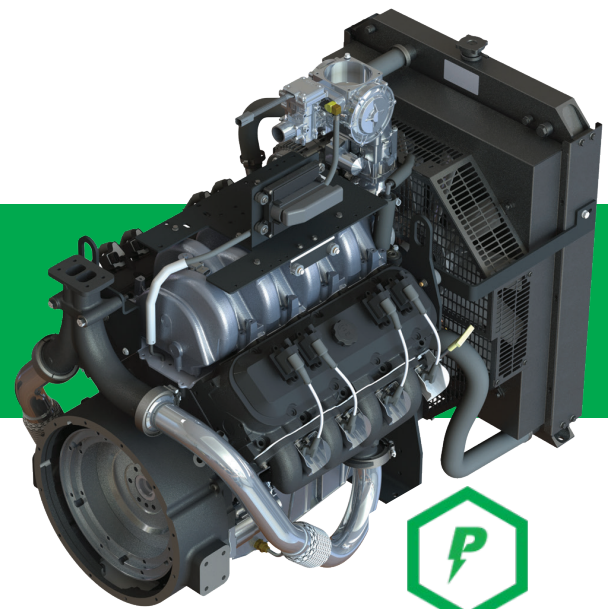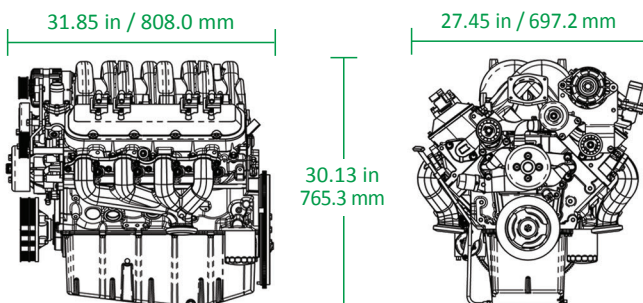

PSI POWER SYSTEMS

FEATURES

- High-flow cylinder head with optimum compression ratio delivers impressive torque
- Roller valve lifters for reduced friction and improved fuel economy
- World-class engine sealing system for superior leak protection
- Crank is forged, induction hardened steel with tangential fillets
- New CCV system (breather) for reduced oil consumption and excellent cold ambient capability

PSI 8.8-LITER ENGINE DATA

Model Number	8.8L
Cylinders	V-8
Induction System	Naturally aspirated
Combustion System	Spark-ignited
Cooling System	Water-cooled
Displacement	535 cid (8,799.9 cc)
Compression Ratio	10:1
Bore & Stroke	4.35 in x 4.50 in (110.5 mm x 114.3 mm)
Fuel Type	Natural Gas / Propane / Dual Fuel
Direction of Rotation	Counter-clockwise viewed on flywheel
Dry Weight	730 lb (307 kg)

POWER RATINGS

		50 Hz (1500 RPM)		60 Hz (1800 RPM)	
STANDBY	NG	85 kWe	101 kWm	100 kWe	121 kWm
	LPG	100 kWe	115 kWm	115 kWe	138 kWm
PRIME	NG	75 kWe	91 kWm	80 kWe	109 kWm
	LPG	85 kWe	103 kWm	100 kWe	124 kWm

kWe values are based on standard assumptions for mechanical and electrical losses. Ratings and performance is subject to site conditions and PSI application and ratings guidelines.

Power Solutions International 201 Mittel Drive, Wood Dale, IL 60191
T: 630-350-9400 • F: 630-350-9588 • www.psiengines.com